


## - Description

A slip modified, biaxial oriented polypropylene film.  
Specially designed for the outside web of laminations  
requiring low C.O.F.

## - Features

- \* Excellent machinability
- \* Good ink adhesion
- \* Excellent extrusion lamination

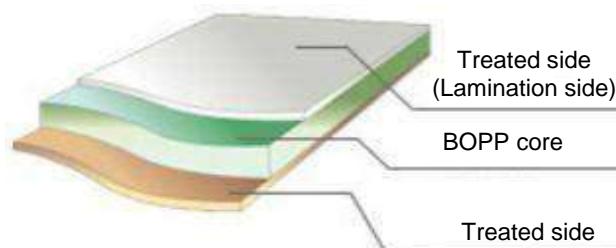

## - Properties Value

Property	Unit	Typical Value**			Test Method
Thickness	µm	12	15		ASTM D2103
Yield	m <sup>2</sup> /kg	92.6	74.1		
Haze	%	1.5	1.5		ASTM D1003
Coefficient of Friction	Film/Film	TI / TO	0.40 / 0.40	0.40 / 0.40	ASTM D1894
Tensile Strength	kgf/mm <sup>2</sup>	MD*	15.0	15.0	ASTM D882
Elongation at Break	%	MD*	145	145	ASTM D882
Gloss	% Gardner 45°		140	140	ASTM D2457
Wetability	Dyne/cm	TI / TO	38/38	38/38	ASTM D2578
Statics	%	TI / TO	10.0 / 10.0	10.0 / 10.0	ASTM D257
Thermal Shrinkage	120°C 15min	MD / TD	4.0 / 3.0	4.0 / 3.0	ASTM D1204

\* MD: Machine Direction, TD: Transversal Direction

\*\* The information contained herein is the best information available, and is believed to be reliable without guarantee of performance either express or implied. No statement with respect to use is intended as a positive recommendation for such use and no warranty is made or intended.