


## • Description

A matte finished, biaxial oriented polypropylene film. Specially designed for elegant laminations such as soap, snacks, posters and book covers.

## • Features

- \* Non glare
- \* Good machinability
- \* Good moisture protection

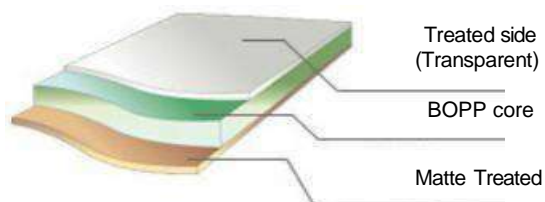

## • Properties Value

Property	Unit	Typical Value**	Test Method	
Thickness	μm	13	ASTM D2103	
Yield	m <sup>2</sup> /kg	85.5		
Haze / Tt	%	85.0 / 95.0	ASTM D1003	
Gloss	Gardner 45°	Matt	6.0	ASTM D2457
		Gloss	80.0	
Coefficient of Friction	Film/Film	Matt	0.40	ASTM D1894
		Gloss	0.80	
Tensile Strength	kgf/mm <sup>2</sup>	MD*	12.0	ASTM D882
Elongation at Break	%	MD*	180	ASTM D882
Wettability	Dyne/cm	Matt	38	ASTM D2578
		Gloss	38	
Statics	%	Matt	20.0	ASTM D257
		Gloss	20.0	
Thermal Shrinkage	%, 120°C 15 min	MD*	4.0	ASTM D1204
		TD*	3.0	

\* MD: Machine Direction, TD: Transversal Direction

\* The information contained herein is the best information available, and is believed to be reliable without guarantee of performance either express or implied. No statement with respect to use is intended as a positive recommendation for such use and no warranty is made or intended.